


KIRLOSKAR SHAKTI

5 - 82.5 KVA ALTERNATORS



Enriching Lives

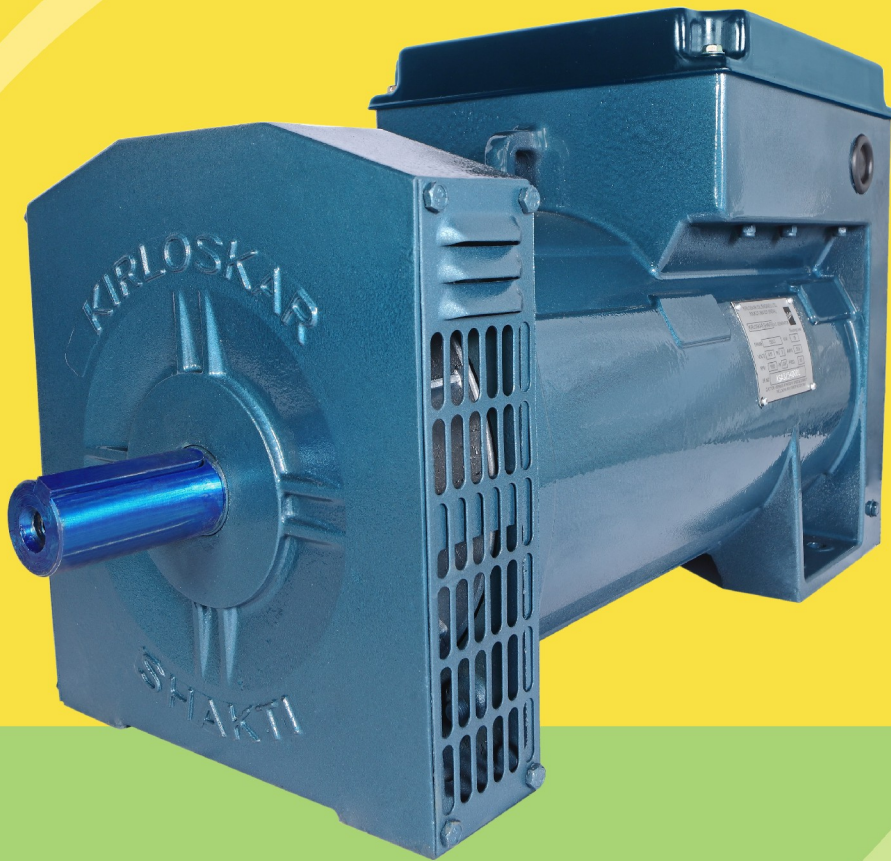


● RELIABLE ● LONG LIFE ● LOW MAINTENANCE ● ROBUST

KIRLOSKAR OIL ENGINES LIMITED

Laxmanrao Kirloskar Road, Khadki, Pune 411003 INDIA Tel. : +91(20) 2581 5341, 2581 0341
Fax : +91 (20) 2581 3208, 2581 0209 www.koel.co.in Toll Free No. : 1800 233 3344

FEATURES

- Self-excited and self regulated with simple excitation system.
- Compact robust design to offer high power-to-weight ratio.
- Voltage built-up from lowest residual magnetism.
- Excellent aesthetics Look
- Replaceable wearing parts and hence longer life.
- Dynamically balanced rotating parts.
- Deep groove ball bearing lubricated and sealed for life
- Easy maintenance and spares availability.

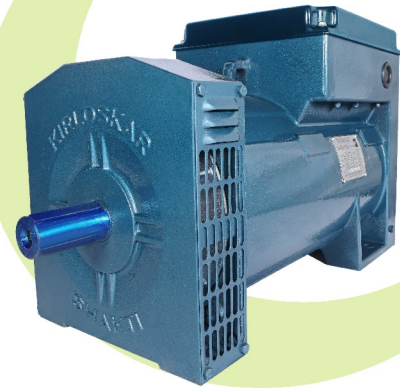

DAMDAR SERIES ALTERNATOR DETAILS						
Performance Details of "KIRLOSKAR SHAKTI" A.C. Generator at 1500 RPM						
	FRAME	KOEL Model	Rating in kVA	ITEM DESCRIPTION	Rated Voltage (Volts)	Rated current (Amps.)
Single Phase 50 Hz, 0.8 P.F	KSA 132MA	KSA.1054.10.0.00	5	KIRLOSKAR SHAKTI DD SERIES-5KVA 1PH 0.8PF CU SERIES	240	20.8
	KSA 132MC	KSA.1064.10.0.00	6	KIRLOSKAR SHAKTI DD SERIES-6KVA 1PH 0.8PF CU SERIES	240	25
	KSA 132MD	KSA.1754.10.0.00	7.5	KIRLOSKAR SHAKTI DD SERIES-7.5KVA 1PH 0.8PF CU SERIES	240	31.3
	KSA 132LC	KSA.1104.10.0.00	10	KIRLOSKAR SHAKTI DD SERIES-10KVA 1PH 0.8PF CU SERIES	240	41.7
	KSA 160SA	KSA.1134.10.0.00	12.5	KIRLOSKAR SHAKTI DD SERIES-12.5KVA 1PH 0.8PF CU SERIES	240	52.1
	KSA 160SC	KSA.1154.10.0.00	15	KIRLOSKAR SHAKTI DD SERIES-15KVA 1PH 0.8PF CU SERIES	240	62.5
	KSA 160MA	KSA.1204.10.0.00	20	KIRLOSKAR SHAKTI DD SERIES-20KVA 1PH 0.8PF CU SERIES	240	83.4
Three Phase 50 Hz, 0.8 P.F	KSA 132MR	KSA.3054.10.0.00	5	KIRLOSKAR SHAKTI DD SERIES-5KVA 3PH 0.8PF CU SERIES	415	6.9
	KSA 132MR	KSA.3654.10.0.00	6.5	KIRLOSKAR SHAKTI DD SERIES-6.5KVA 3PH 0.8PF CU SERIES	415	9
	KSA 132MA	KSA.3084.10.0.00	7.5	KIRLOSKAR SHAKTI DD SERIES-7.5KVA 3PH 0.8PF CU SERIES	415	10.4
	KSA 132MC	KSA.3104.10.0.00	10	KIRLOSKAR SHAKTI DD SERIES-10KVA 3PH 0.8PF CU SERIES	415	13.9
	KSA 132MD	KSA.3134.10.0.00	12.5	KIRLOSKAR SHAKTI DD SERIES-12.5KVA 3PH 0.8PF CU SERIES	415	17.4
	KSA 132LC	KSA.3154.10.0.00	15	KIRLOSKAR SHAKTI DD SERIES-15KVA 3PH 0.8PF CU SERIES	415	20.9
	KSA 160SB	KSA.3204.10.0.00	20	KIRLOSKAR SHAKTI DD SERIES-20KVA 3PH 0.8PF CU SERIES	415	27.8
	KSA 160SC	KSA.3254.10.0.00	25	KIRLOSKAR SHAKTI DD SERIES-25KVA 3PH 0.8PF CU SERIES	415	34.8
	KSA 160MA	KSA.3304.10.0.00	30	KIRLOSKAR SHAKTI DD SERIES-30KVA 3PH 0.8PF CU SERIES	415	41.7
	KSA 160MB	KSA.3334.10.0.00	32.5	KIRLOSKAR SHAKTI DD SERIES-32.5KVA 3PH 0.8PF CU SERIES	415	45.2
	KSA 160MB	KSA.3354.10.0.00	35	KIRLOSKAR SHAKTI DD SERIES-35KVA 3PH 0.8PF CU SERIES	415	48.7
	KSA 160MB	KSA.3404.10.0.00	40	KIRLOSKAR SHAKTI DD SERIES-40KVA 3PH 0.8PF CU SERIES	415	55.6
	KSA 200SB	KSA.3454.10.0.00	45	KIRLOSKAR SHAKTI DD SERIES-45KVA 3PH 0.8PF CU SERIES	415	62.6
	KSA 200SB	KSA.3504.10.0.00	50	KIRLOSKAR SHAKTI DD SERIES-50KVA 3PH 0.8PF CU SERIES	415	69.6
	KSA 200SD	KSA.3634.10.0.00	62.5	KIRLOSKAR SHAKTI DD SERIES-63KVA 3PH 0.8PF CU SERIES	415	86.9
	KSA 200MD	KSA.3754.10.0.00	75	KIRLOSKAR SHAKTI DD SERIES-75KVA 3PH 0.8PF CU SERIES	415	104.3
	KSA 200MD	KSA.3834.10.0.00	82.5	KIRLOSKAR SHAKTI DD SERIES-82.5KVA 3PH 0.8PF CU SERIES	415	114.8

Authorised Dealer :

KIRLOSKAR OIL ENGINES LIMITED

Laxmanrao Kirloskar Road, Khadki, Pune 411003 INDIA Tel. : +91(20) 2581 5341, 2581 0341
Fax : +91 (20) 2581 3208, 2581 0209 www.koel.co.in Toll Free No. : 1800 233 3344

As continuous improvements are contemplated the description and illustrations are not binding.



Enriching Lives